




Timken BEARINGS INDUSTRY

40 mm x 80 mm x 18 mm NTN 6208LLB deep groove ball bearings

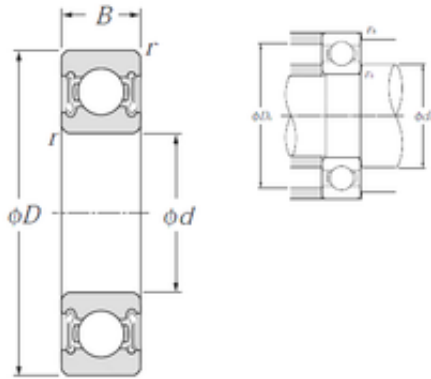

Bearing No. 6208LLB

6208LLB Bearing 2D drawings and 3D CAD models

Size	40x80x18 mm
Bore Diameter	40 mm
Outer Diameter	80 mm
Width	18 mm
d	40 mm
D	80 mm
B	18 mm
C	18 mm
r min.	1,1 mm
da min.	46,5 mm
da max	51 mm
Da max.	73,5 mm
ra max.	1 mm
Weight	0,366 Kg
Basic dynamic load rating (C)	29,1 kN
Basic static load rating (C0)	17,8 kN
(Grease) Lubrication Speed	8 700 r/min
Category	Single Row Ball Bearings
Inventory	0.0
Manufacturer Name	NTN
Minimum Buy Quantity	N/A
Weight / Kilogram	0.368
EAN	4547359004694
Product Group	B00308
Enclosure	2 Seals



Timken BEARINGS INDUSTRY

Precision Class	ABEC 1 ISO P0
Maximum Capacity / Filling Slot	No
Rolling Element	Ball Bearing
Snap Ring	No
Internal Special Features	No
Cage Material	Steel
Enclosure Type	Non-Contact Seal
Internal Clearance	C0-Medium
Inch - Metric	Metric
Long Description	40MM Bore; 80MM Outside Diameter; 18MM Outer Race Diameter; 2 Seals; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Category	Single Row Ball Bearing
UNSPSC	31171504
Harmonized Tariff Code	8482.10.50.68
Noun	Bearing
Keyword String	Ball
Manufacturer URL	http://www.ntnamerica.com
Manufacturer Item Number	6208LLB
Weight / LBS	0.813
Bore	1.575 Inch 40 Millimeter
Outside Diameter	3.15 Inch 80 Millimeter
Outer Race Width	0.709 Inch 18 Millimeter
bore diameter:	40 mm
precision rating:	ISO Class 0
outside diameter:	80 mm
finish/coating:	Uncoated
overall width:	18 mm
bearing material:	High Carbon Chrome Steel



Timken BEARINGS INDUSTRY

bore type:	Round
cage material:	Steel
closure type:	Double Sealed
inner ring width:	18 mm
row type & fill slot:	Single Row Non-Fill Slot
outer ring width:	18 mm
snap ring included:	Without Snap Ring
maximum rpm (grease):	8700 rpm
internal clearance:	CN
fillet radius:	1.1 mm
operating temperature range:	-40 to 120 ° C
maximum rpm:	10000 RPM
dynamic load capacity:	29100 N
series:	62
static load capacity:	17800 N
manufacturer product page:	Click here